

Remote range targets redefined.



CALIENTÉ

CALIENTÉ PASSIVE (NON-POWERED) THERMAL TARGETS take advantage of the infrared in the atmosphere to present an innovative solution for live fire training needs. Many ranges are too remote to run line power, and it's a maintenance hassle to carry batteries up and down range, so Calienté developed a passive thermal target solution to complement its 12V and 120V powered targets.

Calienté's passive targets, when mounted at 15 degrees to the atmosphere, reflect the infrared and show as a cold spot down range in contrast to the ambient environment. These can be cut or masked off to create shapes and profiles of combatants or civilians for friend/foe recognition/engagement training, as well as for various vehicle frontal and flank profiles. Another advantage to the passive target solution is that the parts are easily patched, allowing for long life and a strong return on investment.

Whether powered or unpowered, Calienté offers the broadest and most robust line of thermal targets in the industry. Call today for pricing!

315 E. Wallace St. Fort Wayne, IN 46803 USA
www.calientellc.com/thermaltargets
I 260 426 3800 Fax I 260 426 3838
info@calientellc.com

TARGET DIVISION




Technical Specifications

CALIENTÉ PASSIVE THERMAL TARGETS

Calienté Part Number	Description	L"	W"
CT-P242-AI-WH	White Hot Armed Insurgent	45.6	19.0
CT-P242-AI-BH	Black Hot Armed Insurgent	45.6	19.0
CT-P242-CYT	Coyote	18.7	41.3
CT-P242-E-WH	White Hot Heated Type	40.0	20.0
CT-P242-E-BH	Black Hot Heated Type	40.0	20.0
CT-P242-11-WH	White Hot Silhouette	45.6	19.0
CT-P242-11-BH	Black Hot Silhouette	45.6	19.0
CT-P242-F12-WH	White Hot Head/Shoulders	22.0	20.0
CT-P242-F12-BH	Black Hot Head/Shoulders	22.0	20.0
CT-P242-MS-WH	White Hot Man Shape with Weapon	45.6	19.0
CT-P242-MS-BH	Black Hot Man Shape with Weapon	45.6	19.0
CT-P242-MT	Mortar	35.4	59.0
CT-P242-SM-WH	White Hot Silhouette Man	45.6	19.0
CT-P242-SM-BH	Black Hot Silhouette Man	45.6	19.0
CT-P242-SF	Soldier Fire	45.6	19.0
CT-P242-SW	Soldier Walk	45.6	19.0
CT-P242-BMP-T	BMP Front	59.0	70.8
CT-P242-BMP-KS	BMP Flank	35.4	78.7
CT-P242-BMP-KL	BMP Flank Lg	70.8	208.6
CT-P242-BRD-K	Bradley Flank	35.4	78.7
CT-P242-BRDM-K	BDRM Flank	35.4	78.7
CT-P242-BRDM-T	BDRM Front	59.0	70.8
CT-P242-HMV-K	Humvee Flank	70.8	182.2
CT-P242-TYT-K	Truck Flank	66.9	181.1
CT-P242-TYT-F	Truck Front	66.9	70.8
CT-P242-T55-K	Tank Flank	70.8	181.1
CT-P242-T55-T-WH	White Hot Tank Front	59.0	70.8
CT-P242-T55-T-BH	Black Hot Tank Front	59.0	70.8
CT-P242-T55-TL-BH	Black Hot Tank Front Lg	88.5	106.2
CT-P242-T55-TOP	Tank Top	70.8	141.2
CT-P242-T72-K	T72 Flank	70.8	216.5
CT-P242-C	Roll Coated with Adhesive	6000.0	24.0
CT-P242	Roll Uncoated	6000.0	24.0
CT-P242-SQ	Passive Long Range Square	37.4	37.4
CT-P242-BPS	Black Patch Sheet	17.3	17.3
CT-P242-TPS	Thermal Patch Sheet	17.3	17.3
CT-P242-BPL	Black Patch Sheet Lg	75.7	20.6
CT-P242-TPL	Thermal Patch Sheet Lg	75.7	16.7
CT-P242-14-TRK	Passive Track 1x4	48.0	12.0
CT-P242-24-TRK	Passive Track 2x4	48.0	24.0
CT-P242-26-TRK	Passive Track 2x6	72.0	24.0
CT-P242-26-TRT	Passive Turret 2x6	72.0	24.0
CT-P242-27-HUL	Passive Hull 2x7	84.0	24.0
CT-P242-27-TRT	Passive Turret 2x7	84.0	24.0
CT-P242-E	Passive Silhouette	40.0	20.0
CT-P242-E-CRP	Passive Silhouette on Coroplast	40.0	20.0
CT-P242-BDRM-T-NP	BDRM Front	KIT	KIT
CT-P242-BMP-T	BMP Front	KIT	KIT
CT-P242-B55-T	Truck Front	KIT	KIT



CALIENTÉ

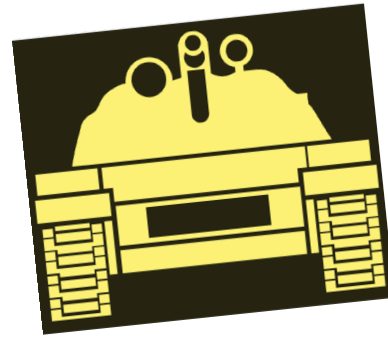

Calienté passive (non-powered) thermal targets feature a strong pressure-sensitive adhesive back for mounting on plywood, plastic or cardboard, or can be stapled in place. For most effective viewing, target should be tilted back 15 degrees from vertical. Masking options include perimeter masking, with the target area showing as cold (black hot), or target masking, where the perimeter shows cold and the target area shows as white hot. Realistic visuals can also be added.

315 E. Wallace St. Fort Wayne, IN 46803 USA

www.calientellc.com/thermaltargets

| 260 426 3800 Fax | 260 426 3838

info@calientellc.com

TARGET DIVISION